

5818 ROUTE 9H & 23 HUDSON, NY 12534

SEPTIC TANKS
DRY WELLS
D-BOXES
CATCH BASINS

**KEELER
VAULT
CO.**


STEPS
CURBING
WHEEL STOPS
CUSTOM WORK

PRECAST CONCRETE PRODUCTS


518-851-6281
518-851-9134
FAX 518-851-7835
www.keelervault.com

MODEL 1000-P
STANDARD 1000 GALLON PUMP STATION
3 INLETS 1 OUTLET


TOP VIEW

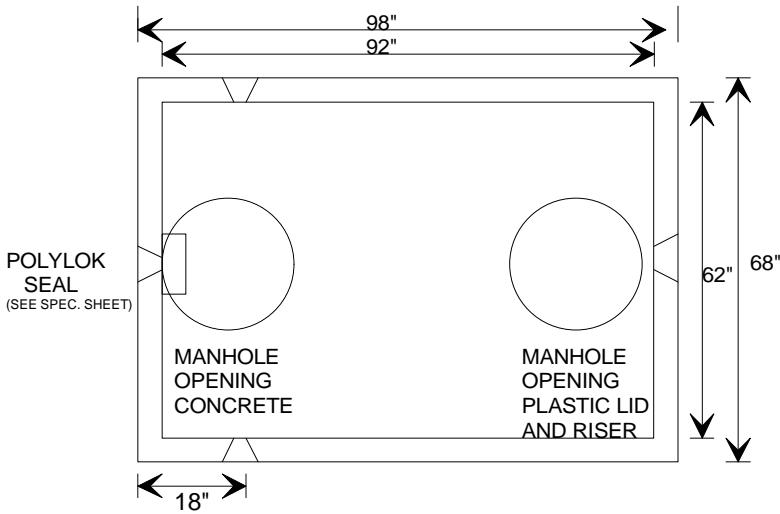

END VIEW

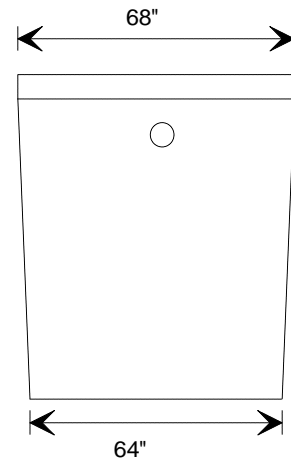

SIDE VIEW

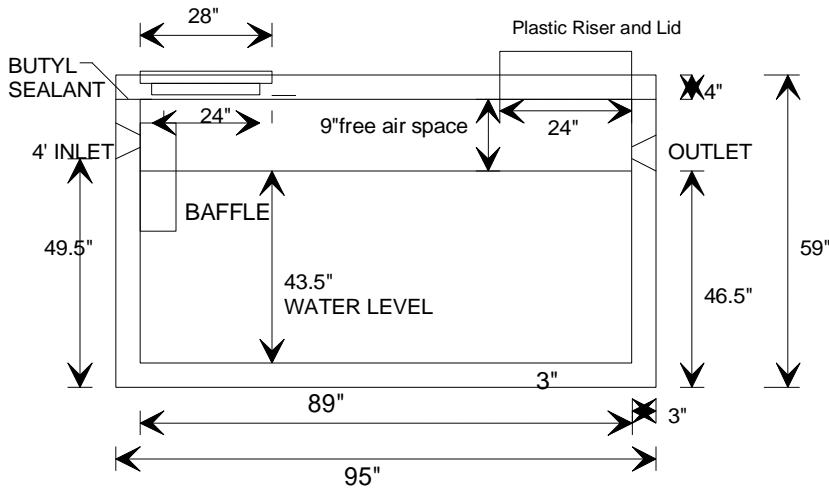

Specifications: Concrete minimum strength-5000 psi at 28 days
Air entrainment - minimum 5%
Reinforcement- Base: Euclid Tuf Strand SF Fiber (6lbs./yd), #3 Grade 60 deformed rebar
Lid: #4 Grade 60 deformed rebar
Pipe connections - Polylok seals (patented)
Baffles - Plastic Polylok inlet
Plastic outlet w/gas deflector (patented) (if pump tank is used as a septic tank)

WEIGHT: 9,310 LBS.

MAXIMUM RECOMMENDED DEPTH OF COVER OVER TANK-3 FEET±