


518-851-6281 518-851-9134 FAX 518-851-7835

PRECAST SIDEWALK PADS

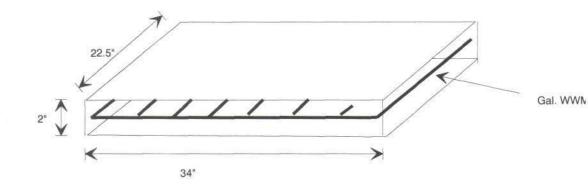

Specifications: Concrete minimum strength 4500 psi at 28 days Air entrainment- minimum 5 % Reinforcement- Gal. WWM Finish- Edged and broomed