

5818 ROUTE 9H & 23 HUDSON, NY 12534

SEPTIC TANKS
 DRY WELLS
 D-BOXES
 CATCH BASINS

**KEELER
 VAULT
 CO.**


STEPS
 CURBING
 WHEEL STOPS
 CUSTOM WORK

PRECAST CONCRETE PRODUCTS



518-851-6281
518-851-9134
FAX 518-851-7835
www.keelervault.com

MODEL 1000-S
STANDARD 1000 GALLON SEPTIC TANK
3 INLETS 1 OUTLET

TOP VIEW

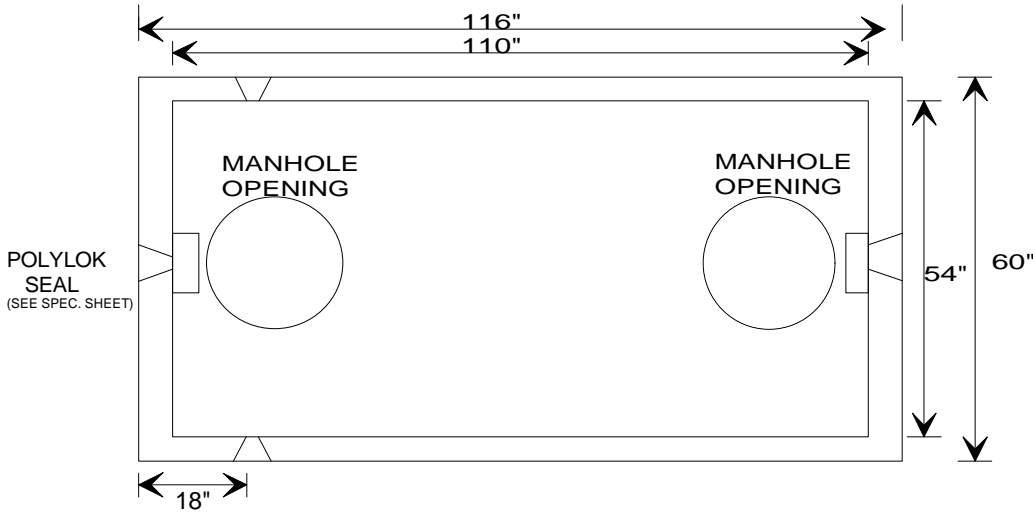

END VIEW

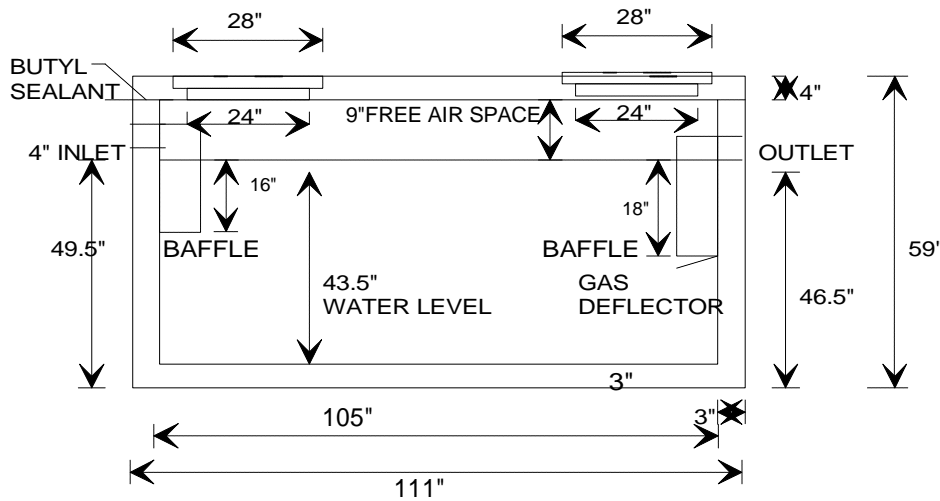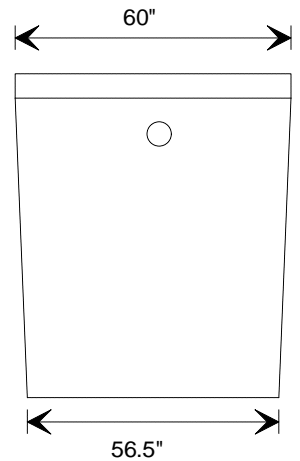

SIDE VIEW

Specifications: Concrete minimum strength-5000 psi at 28 days
 Air entrainment - minimum 5%
 Reinforcement- Base: Euclid Tuf Strand SF(6lbs./yd)
 #3 Grade 60 deformed rebar
 Lid: #4 Grade 60 deformed rebar
 Pipe connections - Polylok seals (patented)
 Baffles - Plastic Polylok inlet and outlet
 w/gas deflector (patented)

WEIGHT: 9310 LBS.

MAXIMUM RECOMMENDED DEPTH OF
 COVER OVER TANK-3 FEET

SEE REVERSE SIDE FOR REINFORCEMENT POSITIONING