

5818 ROUTE 9H & 23 HUDSON, NY 12534

SEPTIC TANKS
DRY WELLS
D-BOXES
CATCH BASINS

KEELER
VAULT
CO.

STEPS
CURBING
WHEEL STOPS
CUSTOM WORK




PRECAST CONCRETE PRODUCTS

518-851-6281
518-851-9134
FAX 518-851-7835

MODEL 1000-P**
STANDARD 1000 GALLON PUMP STATION/GREASE INTERCEPTOR
WITH HEAVY DUTY COVER
3 INLETS 1 OUTLET

TOP VIEW

END VIEW

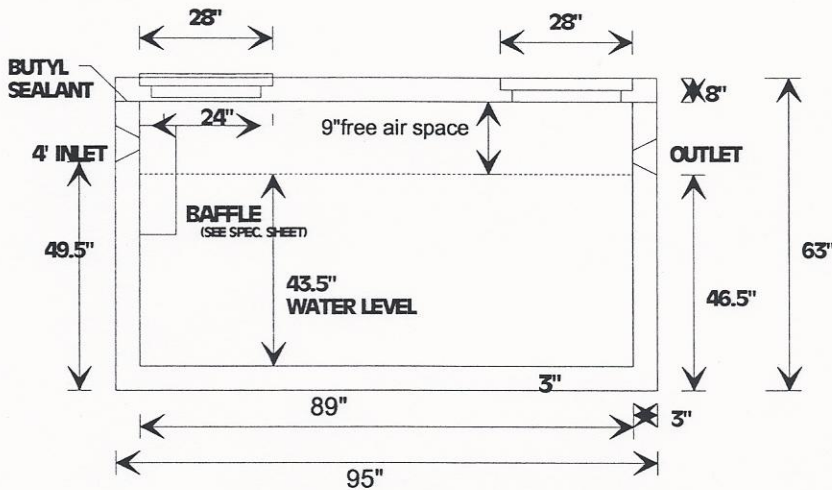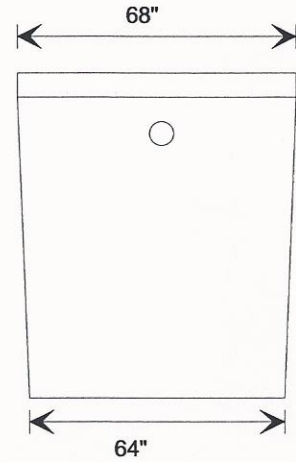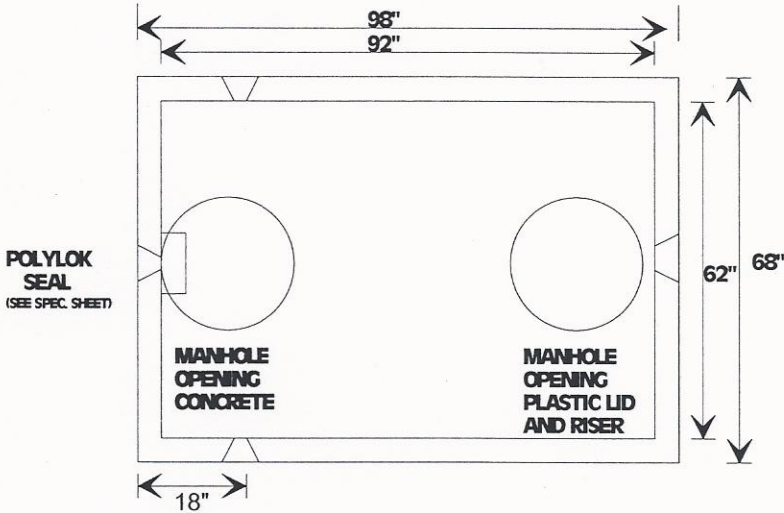

SIDE VIEW

Specifications: Concrete minimum strength-5000 psi at 28 days
 Air entrainment - minimum 5%
 Reinforcement- Base: Euclid Tuf Strand SF Fiber (6lbs./yd), #3 Grade 60 deformed rebar
 Lid: #4 Grade 60 deformed rebar
 Pipe connections - Polylok seals (patented)
 Baffles - Plastic inlet
 Plastic outlet w/gas deflector (patented) (if pump tank is used as a septic tank)

WEIGHT: 11,710 LBS.

MAXIMUM RECOMMENDED DEPTH OF COVER OVER TANK-4.5 FEET, NON TRAFFIC