

5818 ROUTE 9H & 23 HUDSON, NY 12534

SEPTIC TANKS
 DRY WELLS
 D-BOXES
 CATCH BASINS


**KEELER
 VAULT
 CO.**

STEPS
 CURBING
 WHEEL STOPS
 CUSTOM WORK


PRECAST CONCRETE PRODUCTS

518-851-6281
518-851-9134
FAX 518-851-7835

**DOSING CHAMBER USING
 500 GALLON TANK WITH BELL TYPE SYPHON**

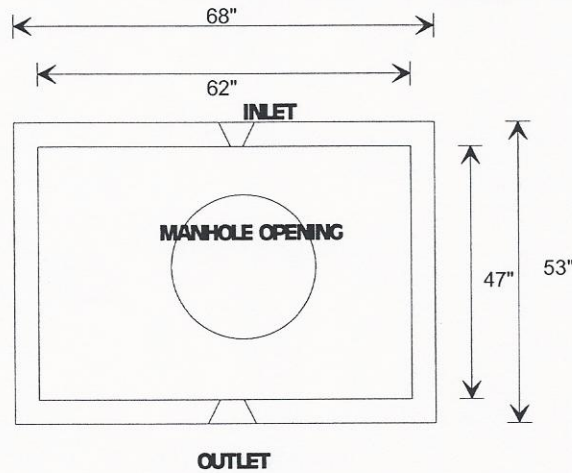

TOP VIEW

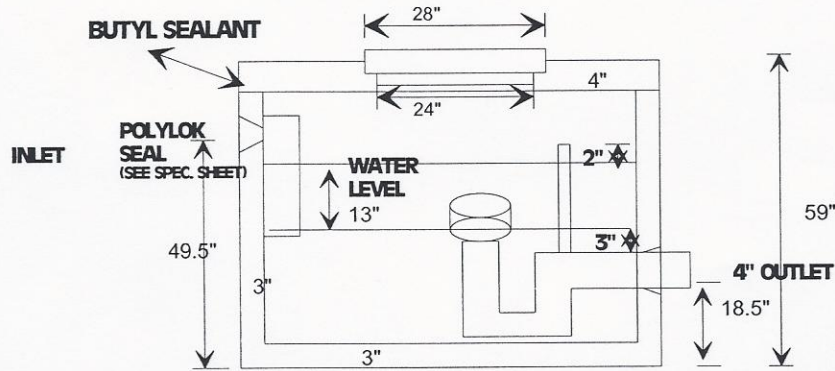

SIDE VIEW

WEIGHT: 5,775 LBS.

MAXIMUM RECOMMENDED DEPTH OF
 COVER OVER TANK-3 FEET

Specifications: Concrete minimum strength-5000 psi at 28 days
 Air entrainment - minimum 5%
 Reinforcement- Base: Euclid Tuf Strand Fiber(6lbs./yd)
 #3 Grade 60 deformed rebar
 Lid: #4 Grade 60 deformed rebar
 Pipe connections - Polylok seals (patented)
 Representative dosing tank using a 3" Syphon with a 13"-14" draw
 equivalent to 160-170 gal dosage to field. Syphon dosing
 tanks are delivered **PIPE READY** unless directed otherwise..

Pricing for dosing tanks will vary. Pricing dependent upon syphon size, tank size, and applications per individual job requirements.