

5818 ROUTE 9H & 23 HUDSON, NY 12534

SEPTIC TANKS
 DRY WELLS
 D-BOXES
 CATCH BASINS

**KEELER
 VAULT
 CO.**


STEPS
 CURBING
 WHEEL STOPS
 CUSTOM WORK

PRECAST CONCRETE PRODUCTS


518-851-6281
518-851-9134
FAX 518-851-7835
www.keelervault.com

MODEL 500-S
STANDARD 500 GALLON SEPTIC TANK
3 INLETS 1 OUTLET


TOP VIEW

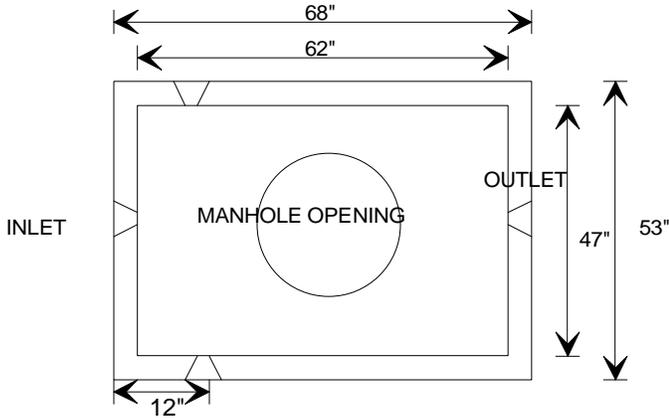

END VIEW

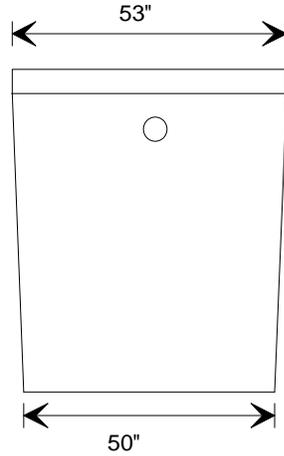

9" FREE AIR SPACE

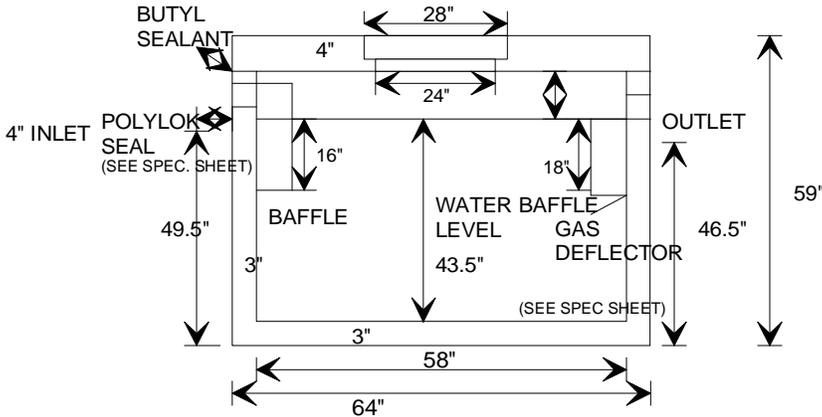

SIDE VIEW

- Specifications:
- Concrete minimum strength-5000 psi at 28 days
 - Air entrainment - minimum 5%
 - Reinforcement- Base: Euclid Tuf Strand SF Fiber(6lbs./yd)
 - #3 Grade 60 deformed rebar
 - Lid: #4 Grade 60 deformed rebar
 - Pipe connections - Polylok seals (patented)
 - Baffles - Plastic Polylok inlet and outlet w/gas deflector (patented)

WEIGHT: 5,775 LBS.

MAXIMUM RECOMMENDED DEPTH OF COVER OVER TANK-3 FEET

SEE REVERSE SIDE FOR REINFORCEMENT POSITIONING