


COMMON COMBINATIONS AND DIMENSIONS

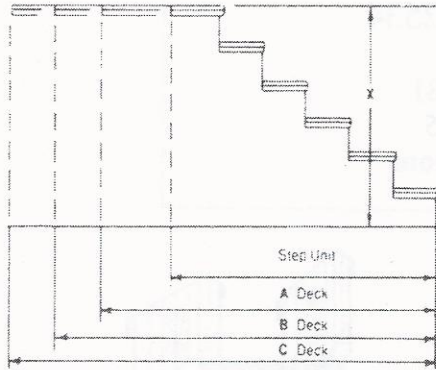

Number Of Steps	X Height	DEPTH			
		Step Unit Only	A 36" Deck	B 42" Deck	C 48" Deck
1	7"	14"	36"	42"	48"
2	14"	26"	48"	54"	60"
3	21"	38"	60"	66"	72"
4	28"	50"	72"	78"	84"
5	35"	62"	84"	90"	96"
6	42"	74"	96"	102"	108"

Widths of these common Custom Step units may be 4, 5, or 6 feet. Information on wider porch or step units may be obtained by phoning our office.

SPECIFICATIONS

- Minimum concrete strength 5000 PSI at 28 days.
- Air entrainment - 5.5% +/-1%.
- Steel reinforcement-#2 rebar
- Railings-steel
- Units may be produced with or without railings.

WARRANTY INFORMATION

- The concrete step unit has been thoroughly inspected prior to delivery and installation and we certify that the unit is in first class condition.
- As in all concrete products there may be some small voids in the vertical walls caused during production and curing.
- The company warrants that the unit is free of all defects in material and workmanship. In the event that any defect in workmanship or material shall develop from normal use during the first year, the company will without charge REPAIR the step unit.
- Spaulding is a result of a chemical reaction caused by the use of de-icers. The application of salt or de-icer compound will cause damage to this step and any other concrete product. If this occurs, we relinquish all responsibility for the product. This company assumes no responsibility for damages to the step unit resulting from accident, lack of care, misuse, frost or freezing action, or other causes beyond its control.
- Steel railings receive one coat each of primer and finish paint. Steel will rust. The rails will require maintenance.
- All step units are manufactured within the parameters of the Residential Building Code of NYS(2007). It is the responsibility of the purchaser to determine if acceptable under local building codes.