

5818 ROUTE 9H & 23 HUDSON, NY 12534

SEPTIC TANKS
 DRY WELLS
 D-BOXES
 CATCH BASINS


**KEELER
 VAULT
 CO.**

STEPS
 CURBING
 WHEEL STOPS
 CUSTOM WORK

PRECAST CONCRETE PRODUCTS

518-851-6281
518-851-9134
FAX 518-851-7835

PRECAST CONCRETE CURBING

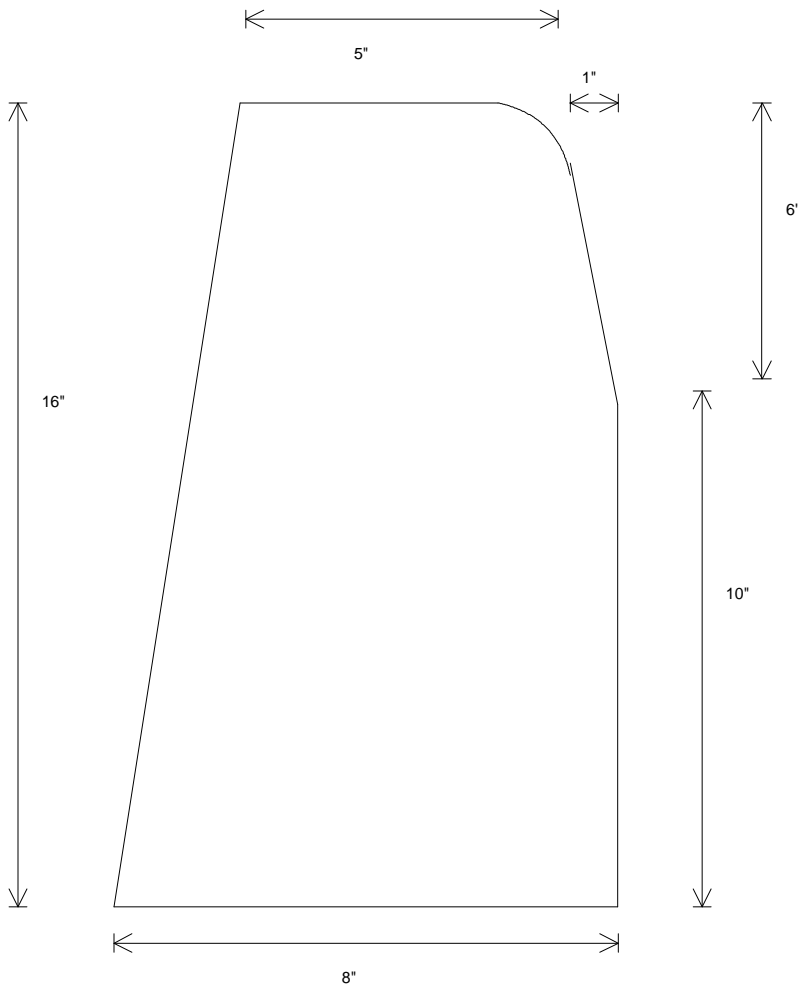

- a) concrete-
 cement type II
 1/2" crushed limestone agg.
 washed sand
- b) air content-5.8%
- c) slump <4.0
- d) reinforcement-none
- e) concrete minimum strength
 5000 psi-28 days
- f) manufactured in accordance with
 NYSDOT 714-04

- a) dependent upon application
 - 1) DOT installation spec sheet
 - 2) Standard installation:
 - a) minimum 2" gravel or dry
 concrete to be used as bedding
 material.
 - b) adjust to line or grade using
 shims.
 - c) Curb to be backed with concrete
 as required by site conditions.
 - d) Units butt together without
 mortar.

WEIGHT: 710 LBS.